

BID SUBMITTAL FORM
Alabama County Joint Bid Program

Heavy Equipment – Bid Item: TRACK-MOUNTED EXCAVATOR - OPTION C-1

Company Name: Cowin Equipment Company Inc.

Address: 4325 Northern Blvd
Montgomery Al 36110

Bid Submitted by: John Edwards
(Name of company representative)

Title: Governmental Sales Manager E-mail address: jedwards@cowin.com

Phone: 850-685-7055 Fax: 334-834-2272

By submitting this bid, we agree:

Initials

The equipment model number identified below meets the bid specs for this bid item

JE

That the bid price will be honored for all counties for the period from **January 1, 2025** to **December 31, 2025**.

JE

The equipment will be delivered at the bid price to all counties participating in the joint bid program

JE

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program

JE

The bid is accompanied by a current catalog or model specification document for the model number identified below

JE

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications

JE

The bid includes the E-Verify documentation required by Alabama law

JE

If awarded the bid, a performance bond will be provided upon request

JE

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine**

JE

TRACK-MOUNTED EXCAVATOR - OPTION C-1

Total Bid Price for Standard Machine: \$ 172,179.00
(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ 1,500.00
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ 229,512.00

Equipment Model #: Volvo EC160E

Description: Hydraulic Excavator

Signature of company representative submitting bid: 

Title: Governmental Sales Manager

* **NOTE:** Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include the freight preparation, delivery and standard warranty cost. Freight preparation, delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.

**BID SUBMITTAL FORM: OPTION COST SHEET
TRACK-MOUNTED EXCAVATOR - OPTION C-1**

By submitting this bid, we agree:

To offer any available options at the percent difference between the Manufacturer's Suggested Retail Price Sheet and the actual bid price on the Standard Machine*

JE

The bid documents include the Manufacturer's Suggested Retail Price Sheet (MSRP) with **any available Options** for the Standard Machine

JE

Equipment Model #: Volvo EC160E

Description: Hydraulic Excavator

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

***Note:** The percent difference between the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the standard machine as specified by these **Bid Specifications** and the actual price bid by the vendor will be calculated to determine the percentage discount to be applied to any available options. The bid price of the freight preparation, delivery cost shall be excluded in determining the percentage discount to be applied to available options. Any individual county may choose to add any available option to the standard machine at the percentage discount at the time of purchase.

**BID SPECIFICATIONS
FOR
TRACK-MOUNTED EXCAVATOR - OPTION C-1**

GENERAL

These specifications shall be construed as the minimum acceptable standards for a track mounted hydraulic excavator with long undercarriage. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturers' equipment. The excavator must be a new current production model and shall meet all EPA and other applicable standards at the time of manufacture.

Use of specific names and numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size and quality of equipment considered best adapted to the uses of the counties participating in this joint bid.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the bid submittal form included in the invitation to bid package. All written warranties to be submitted shall be attached to the bid submittal form.

BID PRICE

The price bid shall include all destination charges, delivery charges, title fees, rebates, and all other applicable costs and refunds.

MANUALS

Each unit shall be provided with one (1) copy of the operator's manual, one [1] repair manual, and one (1) copy of the current parts manual. Units will not be accepted for delivery until the manuals as outlined above are received by the purchaser.

REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 7,500 hours of use for the piece of equipment. If any replacement parts are not delivered within three (3) working days of an order being placed, the bidder will deliver an equivalent machine for the county to use at no cost to the county until such time as the parts are delivered to the county so it can affect repairs to its machine.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty. Warranty shall include service response time of maximum of 36 hours within notification by county.

Yes No
Page# _____
or
Attachment

WEIGHT

Minimum 37,000 lbs. equipped with minimum 28 inch wide track shoes.

Yes No
Page # 24

ENGINE

Four Cylinder, turbocharged, minimum 245 cubic inch displacement diesel engine capable of a minimum 110 net horsepower.

Yes No
Page # 24

Engine shall be manufactured by the equipment manufacturer.

Yes No
Page # 20

UNDERCARRIAGE

Track length shall be minimum 12' 10".

Yes No
Page # 22

Track shoe width shall be minimum 28" (Triple grouser Shoes)

Yes No
Page # 20

Minimum seven (7) track rollers per side.

Yes No
Page # 20

Minimum two (2) carrier rollers per side.

Yes No
Page # 20

CAPACITIES

Fuel Tank Capacity – 66 gallon minimum

Yes No
Page # 20

Hydraulic Tank Capacity – 23 gallon minimum

Yes No
Page # 20

Engine Coolant – 4.7 gallon minimum

Yes No
Page # 20

BOOM AND STICK

One piece boom with minimum 16' 9" length

Yes No
Page # 22

Stick shall be a minimum 8' 6" long

Yes No
Page # 22

DIMENSIONS

Reach at ground level –28' 7" minimum

Yes No
Page # 23

Lifting Capacity at ground level, 15' over front of machine shall be a minimum 14,300 lbs.

Yes No
Page # 25

Lifting Capacity at ground level, 15' over side of machine shall be a minimum 8,300 lbs.

Yes No
Page # 25

Bucket breakout force – minimum 22,250 lbs.

Yes No
Page # 23

Stick digging force – minimum 16,800 lbs.

Yes No
Page # 23

BUCKET

Standard with no bucket. Buckets will be considered optional attachments.

HYDRAULICS

Hydraulic pump output shall be a minimum of 76 GPM

Yes No
Page # 21

CAB

Enclosed ROPS cab:

Yes No
Page # 26

Heater

Yes No
Page # 26

Factory installed air conditioning

Yes No
Page # 26

AM/FM radio

Yes No
Page # 26

Suspension seat

Yes No
Page # 27

ACCA

Volvo Construction Equipment



John Edwards
Governmental Sales Manager
850-685-7055
jedwards@cowin.com

EC160E

VOLVO EXCAVATORS 16.5-20.7 t / 36,266-45,592 lb 148 hp



A passion for performance.

At Volvo Construction Equipment, we're not just coming along for the ride. Developing products and services that raise productivity – we are confident we can lower costs and increase profits for customers around the globe. Part of the Volvo Group, we are passionate about innovative solutions to help you work smarter – not harder.

Helping you to do more

Doing more with less is a trademark of Volvo Construction Equipment. High productivity has long been married to low energy consumption, ease of use and durability. When it comes to lowering life-cycle costs, Volvo is in a class of its own.

Designed to fit your needs

There is a lot riding on creating solutions that are suited to the particular needs of different industry applications. Innovation often involves high technology – but it doesn't always have to. Some of our best ideas have been simple, based on a clear and deep understanding of our customers' working lives.



You learn a lot in 180 years

Over the years, Volvo has advanced solutions that have revolutionized the use of construction equipment. No other name speaks Safety louder than Volvo. Protecting operators, those around them and minimizing our environmental impact are traditional values that continue to shape our product design philosophy.

We're on your side

We back the Volvo brand with the best people. Volvo is truly a global enterprise, one that is on standby to support customers quickly and efficiently – wherever they are.

We have a passion for performance.

A strong, dedicated, capable dealer network.


Our dealers are strategically located throughout North America to provide the equipment you need and the parts and service support you demand for a productive and profitable operation.



The strength of our dealer network is enhanced with extensive individualized product support training at our best-in-class Customer Center in Shippensburg and through hands-on training. Using a great Product Demonstration Center featuring a dedicated area for most common applications, visitors operate equipment from our entire product line under a variety of simulated working conditions. This facility is in year-round use by our dealers and customers.

Building the best starts right here.

The products designed and manufactured by Volvo Construction Equipment have their beginnings at the most advanced Research & Design centers in the industry. Volvo CE machines are designed in 11 R&D centers and produced in 15 manufacturing facilities across the world.

The major R&D center and manufacturing plant in the Americas is located in Shippensburg, Pennsylvania. This facility has been in operation for over 30 years and – with its recently added 200,000 sq. ft. expansion – now covers 570,000 sq. ft. on an 80 acre campus. Dedicated work teams and highly advanced technologies and techniques using the Volvo Production System ensure continuous quality improvements, labor savings and cost control to reach the high quality that our customers have come to expect from Volvo.

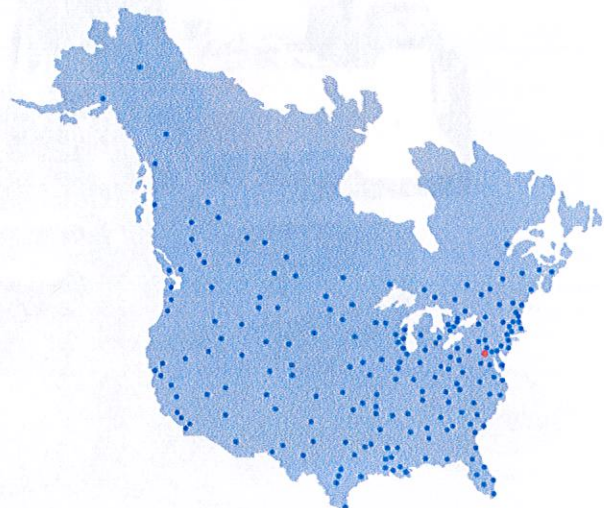

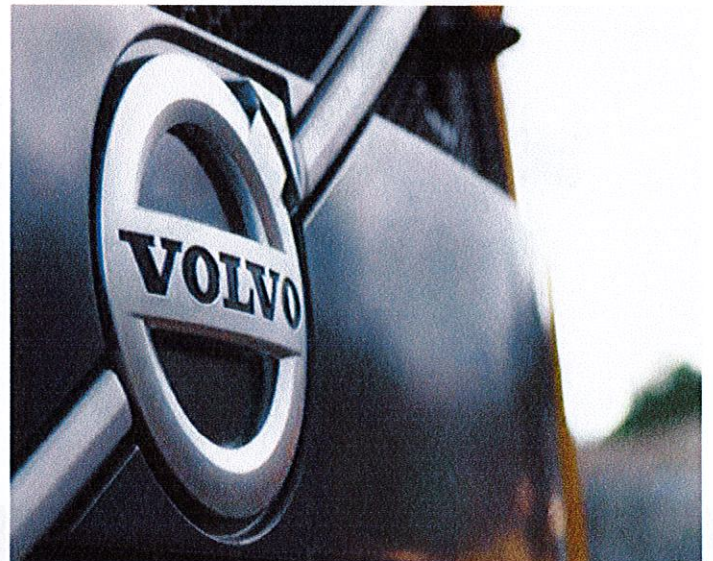

Volvo Trucks

Renault Trucks

Mack Trucks

UD Trucks



Volvo Buses

Volvo Construction Equipment

Volvo Penta


Volvo Financial Services

Effortless Efficiency.

Volvo's new EC160E provides a range of new features to ensure efficiency is a key priority. By carefully considering every duty and component, a machine has been produced that incorporates maximum uptime while also reducing fuel consumption and cycle times – all while delivering elite performance.

Volvo engine

Featuring proven advanced technology, and built on decades of experience, Volvo's robust D4 Tier 4 Final engine boasts more power - while reducing both fuel consumption and emissions to deliver superior quality, reliability and durability.

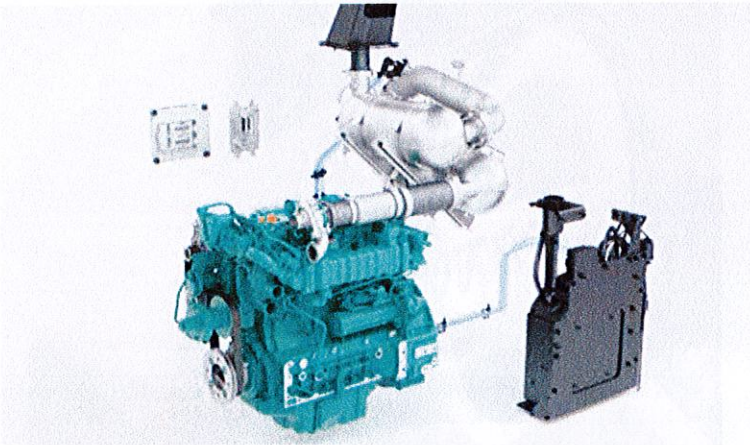

Boom float function


With the boom float function, the pump flow for boom lowering can be saved or used for other functions, reducing the cycle time. Also, the grading operation can be made easier.

Auto engine shutdown

To reduce fuel consumption, the engine will automatically switch off when the machine is inactive for a pre-set amount of time (five minutes is the default setting).

Increased power

The increased engine power combined with the increased pump flow creates a highly responsive combined operation and travel. It also produces faster cycle times and low fuel consumption which leads to higher productivity.

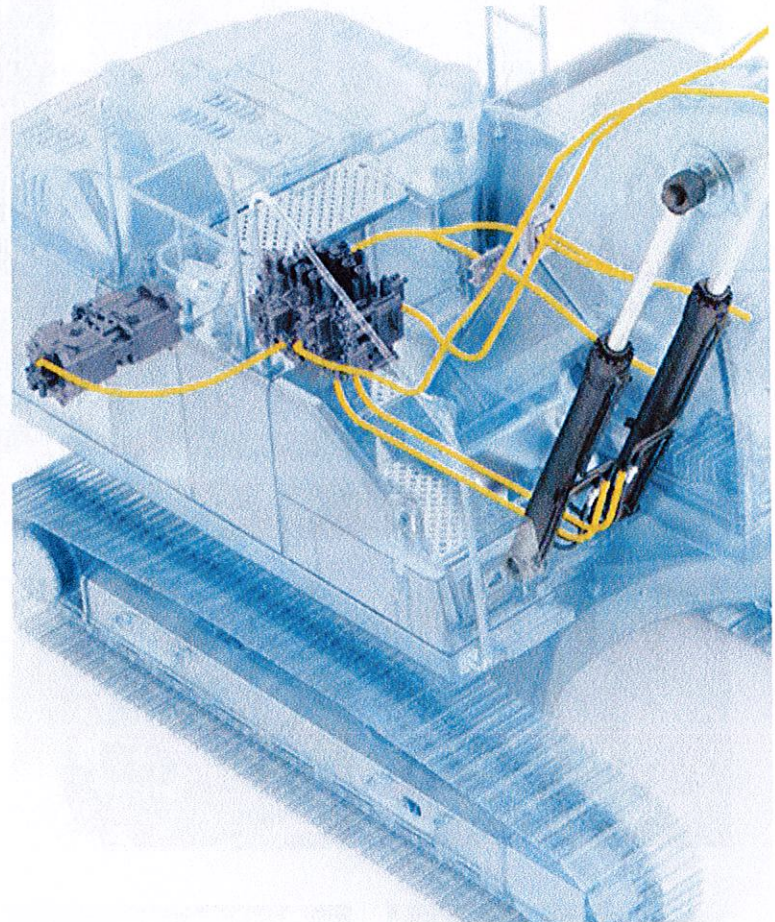

Main Control Valve and Software

This valve is compatible with software in the machine – building on the already superior controllability by providing a smooth and easy operation. It is also compatible with Volvo's ECO mode – this provides electronic pump control to enhance fuel efficiency.



Optimized hydraulics system

The hydraulics system, combined with the fully electronic control system and advanced ECO mode, has been optimized to work in harmony with D4 Tier 4 Final engine to match the engine power, reduce power loss and improve controllability and response time.



Human Machine Interface (HMI)


All machine interfaces – including joysticks, keypad, panel and larger LCD monitor – are ergonomically designed for optimum control and efficiency, resulting in increased productivity and operator comfort. The number of switches have been simplified and climate control integrated into the keypad for easy adjustments.

Making hard work easy.

The EC160E has been ergonomically designed for convenience and ease of use, allowing the operator to take control in comfort. The spacious cab design, controls and features increase productivity by ensuring the machine takes the strain and not the operator.

Side view camera

As well as the rear view camera, there is now a side view camera option to cover the visual blind spot. Both views are displayed on the color monitor, creating a safer working environment, protecting the operator and personnel on the ground.

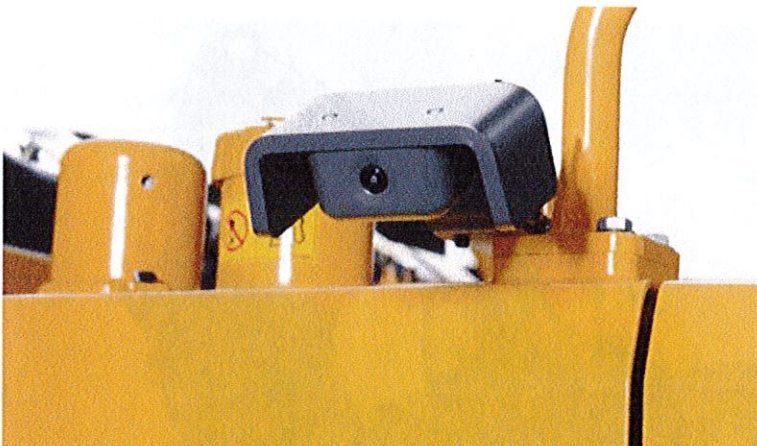


Short-cut key

For added convenience, functions such as windshield wipers, cameras, auto-mute function can all be assigned a short-cut button on the joystick. This allows the operator to select a function during the application without disruption.



Bluetooth®

To aid operator convenience and support better productivity, you can now connect a Bluetooth device to the machine enabling hands free operation.

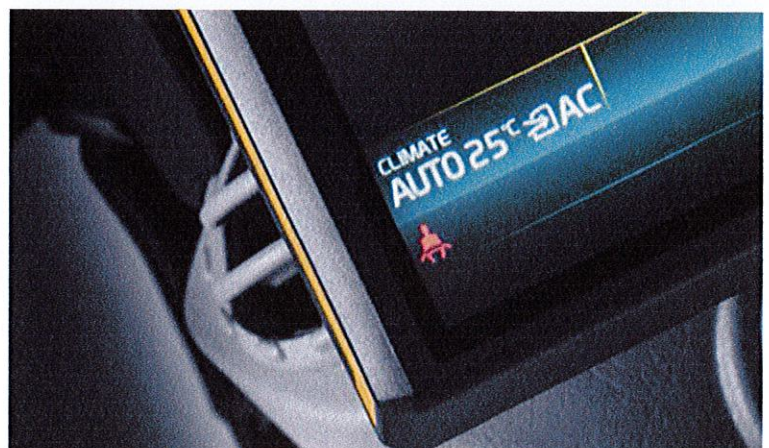

Climate control system


With more than 98% efficiency, Volvo's air filtration system provides the cleanest operator environment in the industry - even in dusty conditions. The high-capacity heating and ventilation system improves comfort, enhancing productivity.

From Strong to Stronger.

The EC160E not only encompasses state-of-the-art design but Volvo also recognizes that for technology to be truly innovative, top priorities need to be durability, quality and reliability for every function. This is why care has been taken to ensure every aspect of the machine is built to last while operating at the highest level of productivity.


ROPS

Volvo cabs are ROPS certified according to the rigorous ISO standards. Their reinforced steel structures ensure the operator is protected in the unlikely event of the machine rolling over..

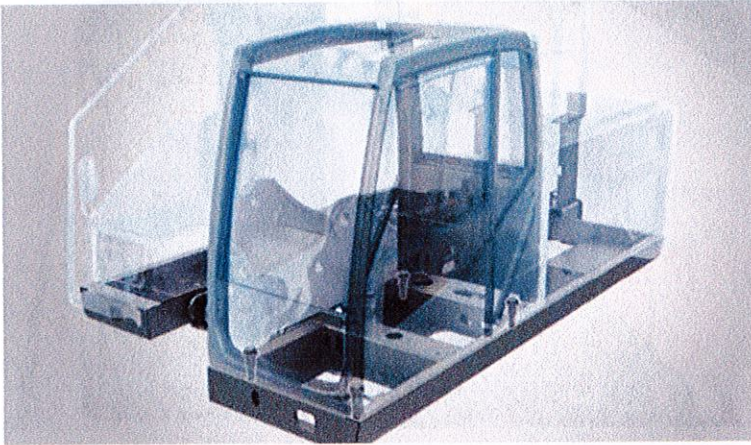

Boom and Arm

The robust design includes internal plates positioned to support pressure points during the range of applications. This helps disperse the stress from high-pressure areas of the boom and arm, to ensure maximum productivity time after time, during the most demanding applications.

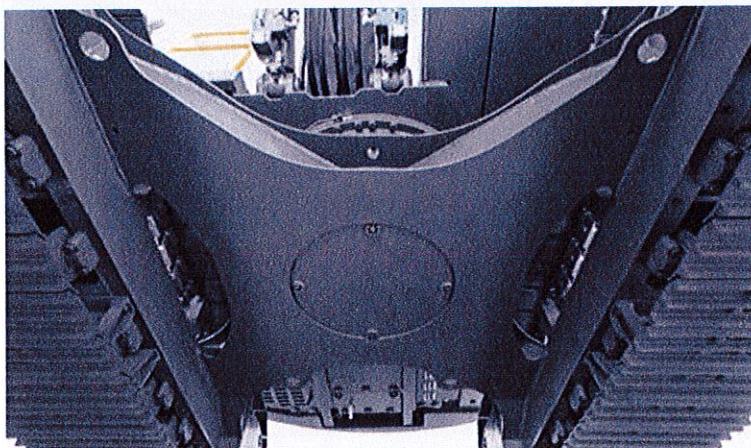

Lower frame

The intelligently designed X-shape lower frame enables even weight distribution increasing stability and durability - preventing damage from rock and debris.




Undercarriage

The idlers, track links, upper and bottom rollers are built to withstand all elements and terrain, to create improved long-lasting durability and support maximum uptime.



Built to last

Working in tough conditions means every component matters - this is why Volvo pays extra attention to each detail during the manufacturing process. Silicone caulking is used to prevent rust, waterproof harnesses and connections are installed - as well as heavy-duty door hinges and bolted-on protection for the work lights.

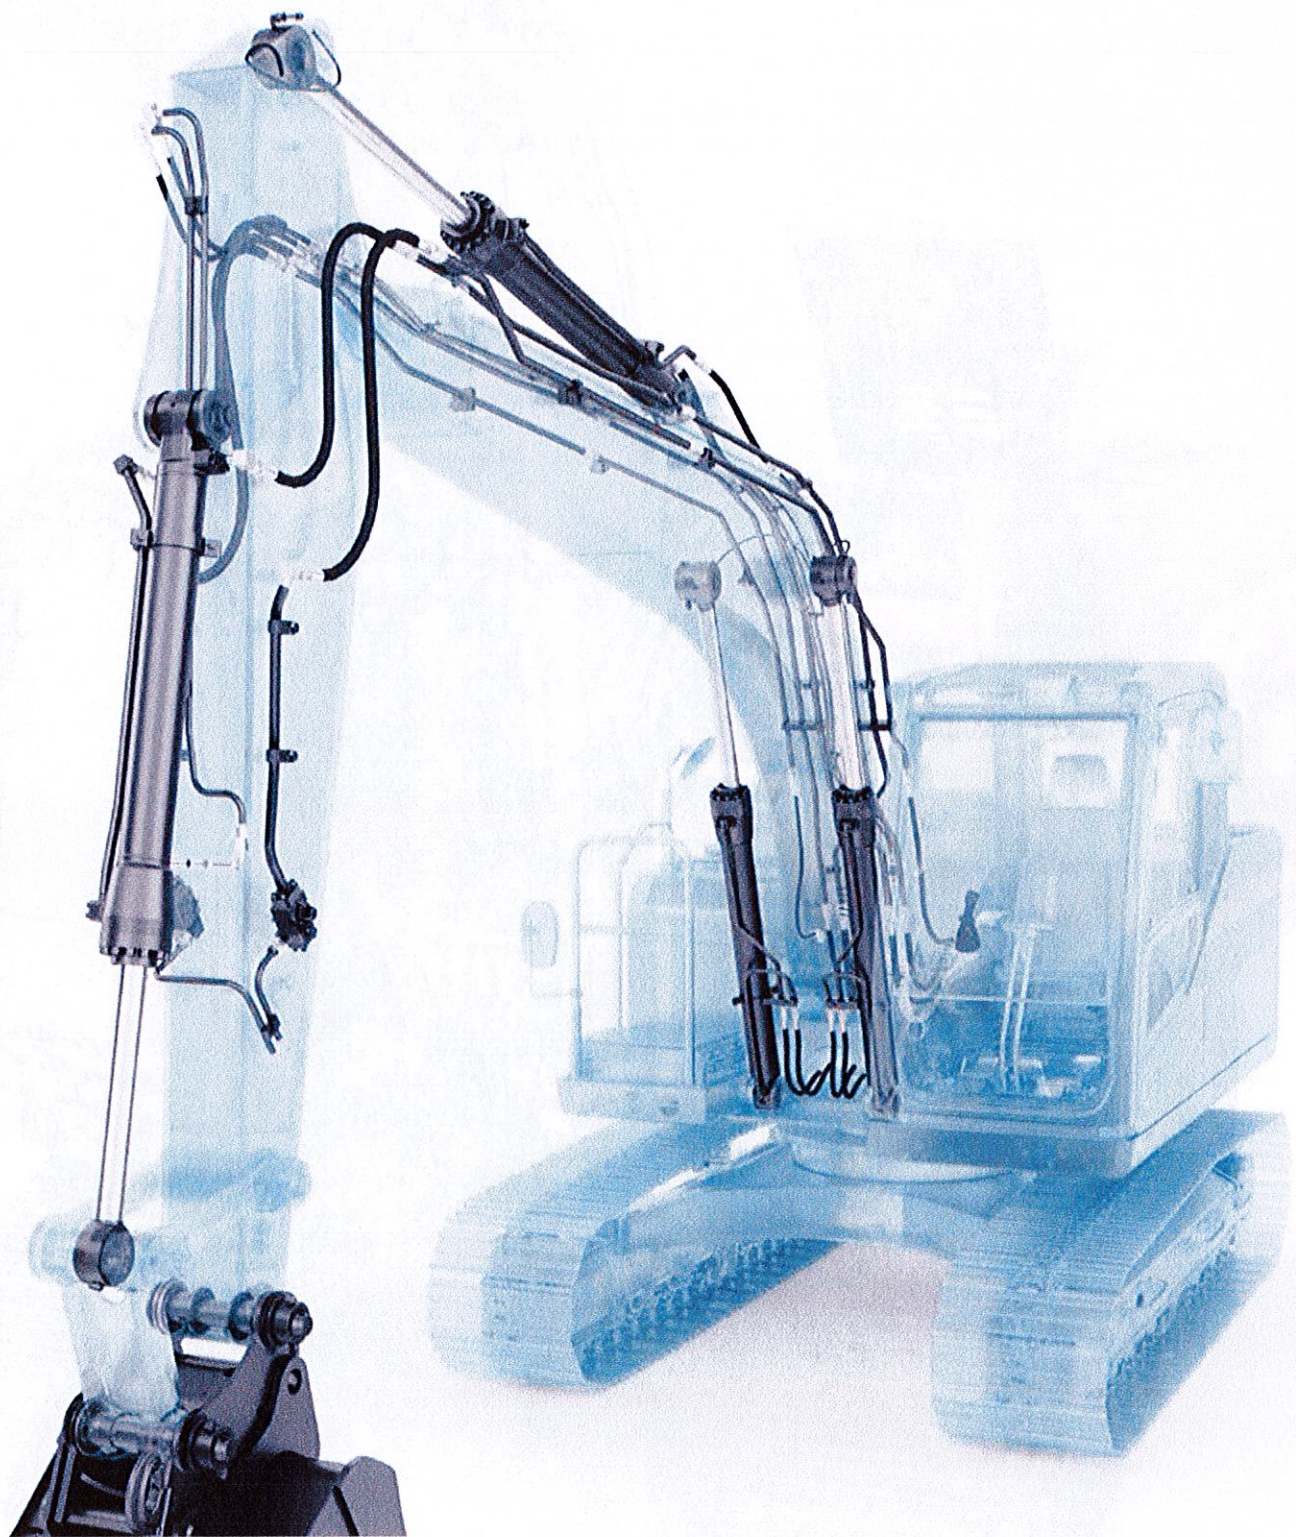

Ultimate tool carrier



The Volvo excavator can be outfitted with a wide variety of auxiliary circuits from the factory, from breaker and shear piping (X1) to rotator piping (X3). State of the art hydraulics provide the correct flow and pressure for special attachments such as mowers and grinders, shears, crushers and tilt rotators among other attachments. You can choose between the one or two pump flow to maximize profits and productivity..

Fits with Variety.



Volvo has listened to customer needs and designed an excavator that is not only capable of doing a variety of applications but can do them all at an unrivaled consistent quality. Not only can the EC160E work with a large number of attachments, it can easily switch between them to maximize uptime and productivity.

Attachment Management System

The password protected management system allows storage for up to 20 different attachments. It pre-sets and permits hydraulic flow and pressure to be adjusted within the cab, which ensures the use of various attachments for increased versatility.

Extra piping

An additional piping solution is available on the breaker and shear piping (X1), accommodating the use of tilt/rotator attachments.

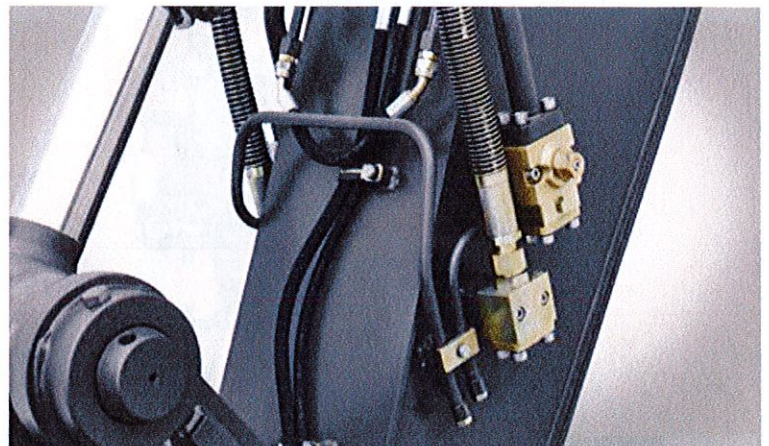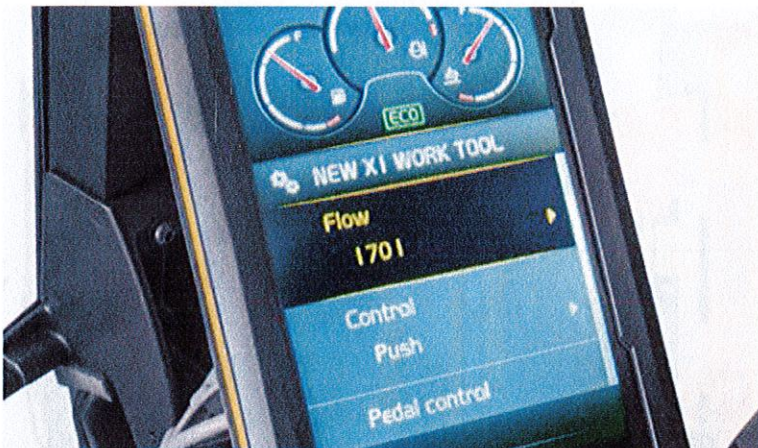

Electrical pedal

The electric pedal offers precise control to allow the operator to use a wider variety of attachments.

Response mode


The attachment response sensitivity can be adjusted using the keypad. This allows the operator to tailor machine response for maximum impact in different environments.

Ground Control.

Proactive maintenance is crucial to prolong machine life – this is why making inspections safe and easy is a priority. Volvo has grouped access points together and made them safer to reach to ensure regular checks to maximize machine uptime while reducing the chances of any surprises.



Grouped filters

Filters are well grouped and easily accessible from the ground level. This facilitates the speed and ease of servicing.

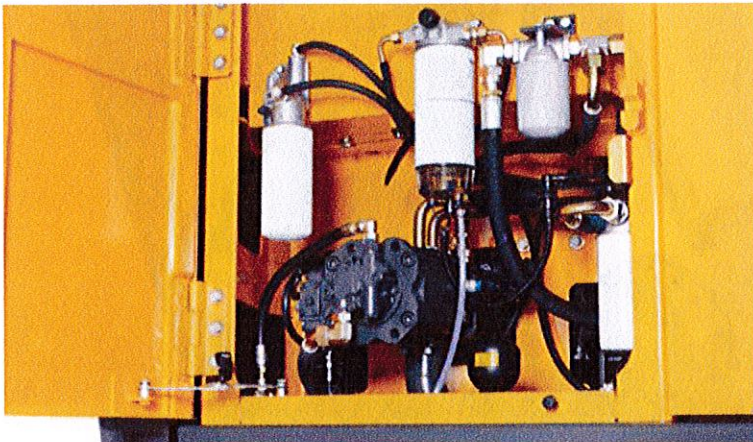

Single layer cooling system

The radiator, charged air cooler and hydraulic oil cooler are situated side-by-side on a single layer, to maximize efficiency, reduce blockages and aid cleaning. The system is easily accessed from ground level by simply opening the side door.

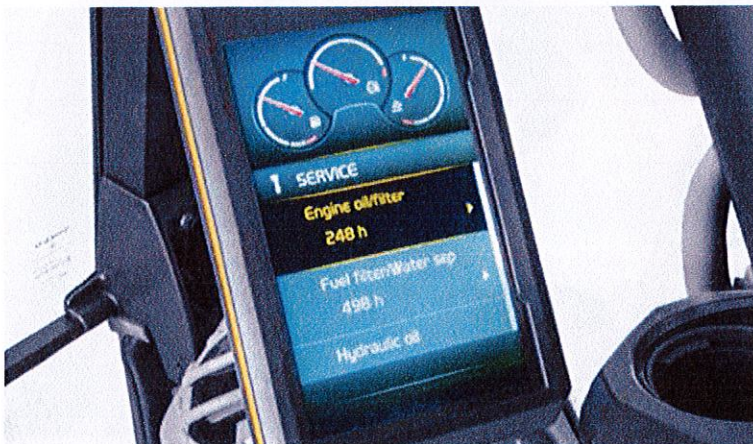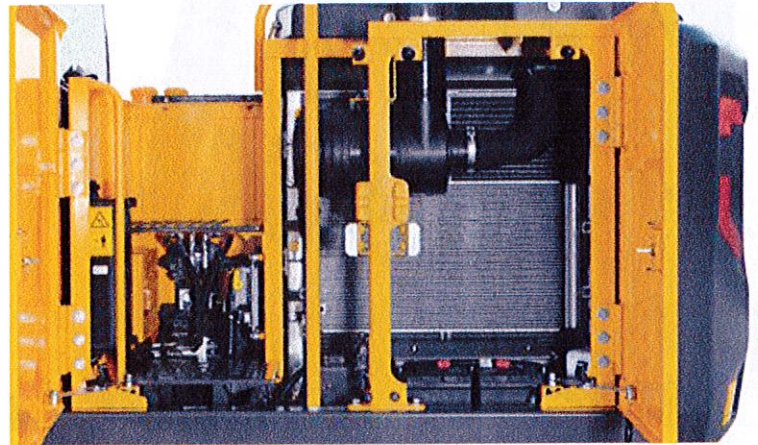

Service interval alerts

Real-time service alerts are displayed on the color monitor to enable diagnostic checks. Separate service intervals include – the engine oil filter, fuel filter, water separator, hydraulic oil and hydraulic oil filter. This ensures peace of mind and maximum uptime.



Anti-slip steel plates

Well-positioned punched anti-slip plates provide superior grip and durability. The design facilitates easy cleaning while ensuring safety.



Service access

Easy access for maintenance means regular checks are completed faster – increasing uptime and driving down total cost of ownership. The E-series features safe access guardrails to assist in checking the hydraulic tank, fuel tank and Diesel Exhaust Fluid (DEF). This is in addition to the easily accessible side entry, through a wide compartment door.



Matched attachments




Volvo's durable attachments have been purpose-built to work in perfect harmony with Volvo machines, forming one solid, reliable unit. With functions and properties ideally matched, Volvo attachments are an integrated part of the excavator for which they're intended.

Mix and match for a superior fit.

Maximize your productivity and profitability with Volvo's EC160E crawler excavator and a range of durable attachments. Increase your versatility, access more applications and perform a variety of tasks – all while experiencing faster cycle times and excellent control.


Buckets – GP/HD/XD

Volvo's buckets are the perfect tool for digging and re-handling in all conditions from soft, medium and hard materials. Heavy-duty buckets are intended for productive digging in compact materials. All provide maximum productivity and long life and feature the Volvo Tooth System..

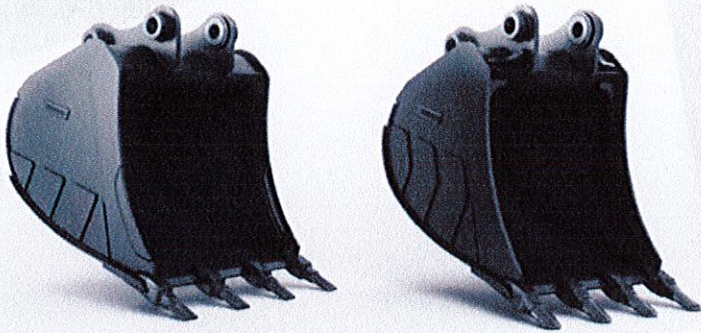

Breakers

The HB-Series of hydraulic breakers are optimized to the specific weights of Volvo machines and tailored to Volvo quick couplers for swift, safe and simple attachment changes. They are available with a full assortment of tools.

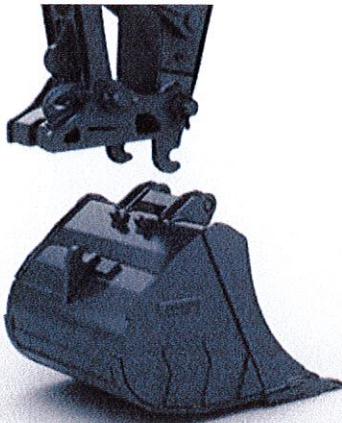


S-type Coupler

The Volvo S-type quick coupler is designed to work with Volvo attachments – delivering ultimate compatibility and unrivalled performance.

Genuine Volvo wear parts

Volvo offers a selection of economic, replaceable wear parts including high quality teeth, segments, side cutters, adapters and shrouds to protect the bucket and ensure long life.

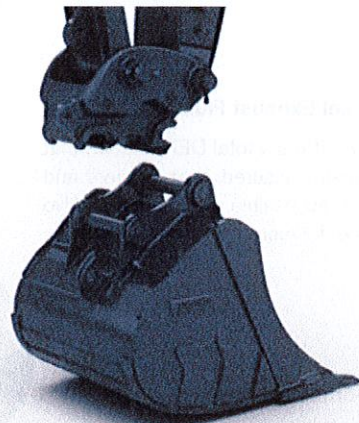

Universal Quick Coupler

The Volvo universal quick coupler offer maximum versatility. It picks up a variety of attachments from various manufacturers and meets new safety regulations.

Improved total cost of ownership.

Boom and arm

To achieve the best performance, select the most suitable boom and arm configuration combination for your requirements.



Ultimate tool carrier

Designed to not only be compatible with a range of attachments, but also to enhance their performance by easily and quickly switching to accommodate any needs.



Optimized hydraulics

Designed to perfectly match the engine power, reduce power loss, and improve controllability and response time.

Diesel Exhaust Fluid (DEF)


Volvo offers a total DEF solution that is quality assured, cost efficient and easily accessible. Contact your Volvo dealer for more information.

Boom float

The pump flow for boom lowering can be saved or used for other functions, reducing the cycle time. Also, the grading operation can be made easier.

Attachment management system

The password protected management system allows storage for up to 20 different attachments. It pre-sets and permits hydraulic flow and pressure to be adjusted within the cab.

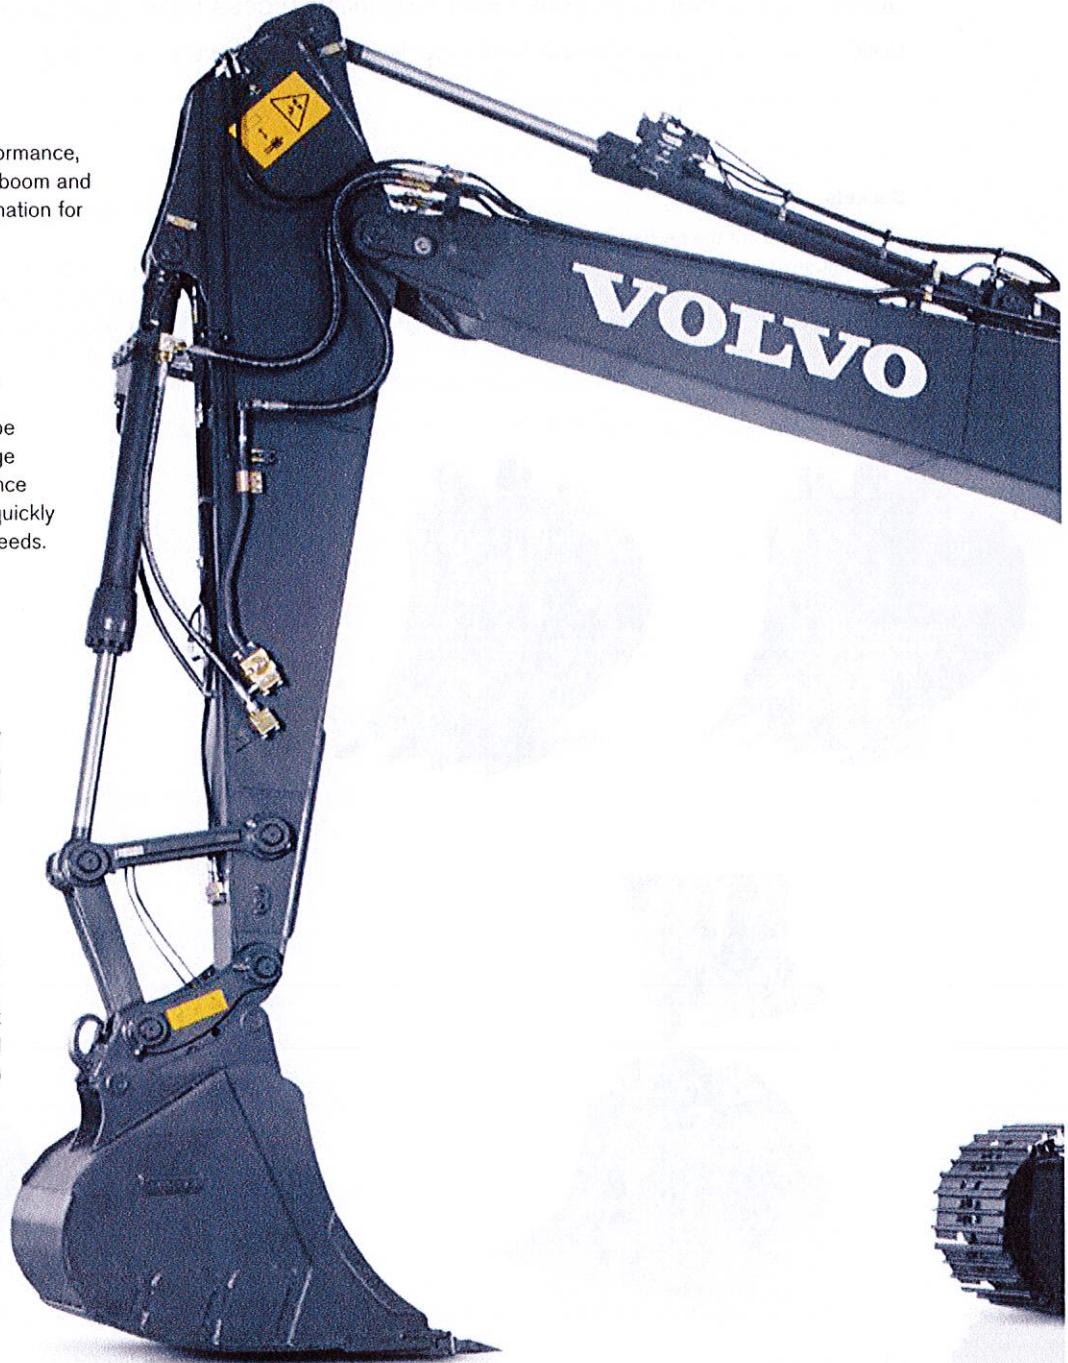

Side view camera

Covers the visual blind spot at the side of machine. View is displayed on the color monitor, creating a safer working environment, protecting the operator and personnel on the ground.

Short cut key function

For ease of use, functions such as windshield wipers, cameras, auto-mute or power max function can all be assigned a short-cut button on the joystick



HMI

All machine interfaces are ergonomically positioned and designed for optimum control and efficiency.

Bluetooth®

Bluetooth and hands-free functions have been added, allowing the operator to connect to wireless functions for increased comfort and safety.



Service access

The E-series features a new convenient and safe access - such as guardrails - to check the hydraulic tank, fuel tank and Diesel Exhaust Fluid. This is in addition to the easily accessible side entry, through a wide compartment door.

Volvo engine

Volvo's D4 Tier 4 Final IV engine boasts more power while reducing both fuel consumption and emissions; delivering superior quality, reliability and durability.

Grouped filters

Filters are well grouped and easily accessible from the ground level. This facilitates the speed and ease of servicing.



Built to last

Volvo pays attention to the details. Silicone caulking is used to prevent rust, waterproof harnesses and connections have been installed - as well as heavy-duty door hinges and bolted-on protection for the framework lights.



Adding value to your business.

Being a Volvo customer means having a complete set of services at your fingertips. Volvo can offer you a long-term partnership, protect your revenue and provide a full range of customer solutions using high quality parts, delivered by passionate people. Volvo is committed to the positive return of your investment.



Complete Solutions

Volvo has the right solution for you. So why not let us provide all your needs throughout the whole life cycle of your machine? By listening to your requirements, we can reduce your total cost of ownership and increase your revenue.



Genuine Volvo Parts


Our attention to detail is what makes us stand out. This proven concept acts as a solid investment in your machine's future. Parts are extensively tested and approved because every part is vital for uptime and performance. Only by using Genuine Volvo Parts, can you be sure that your machine retains the renowned Volvo quality.



Service Network

In order to respond to your needs faster, a Volvo expert is on their way to your job site from one of our Volvo facilities. With our extensive infrastructure of technicians, workshops and dealers, Volvo has a comprehensive network to fully support you using local knowledge and global experience.

PROFITABILITY

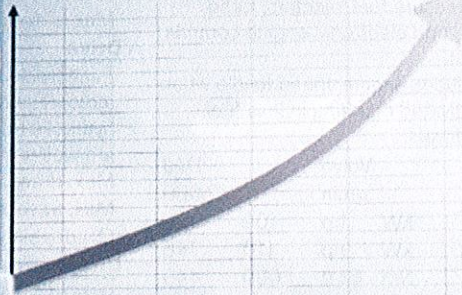

SERVICE PLAN

| DAY01 | DAY02 | DAY03 | DAY04 | DAY05 | DAY06 | DAY07 |
|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | ✓ |
| | | | ✓ | ✓ | | |
| | ✓ | | | | ✓ | ✓ |
| | | ✓ | | | | |
| ✓ | | | ✓ | | | |

FUEL CONSUMPTION



Customer Support Agreements

The range of Customer Support Agreements offer preventive maintenance, total repairs and a number of uptime services. Volvo uses the latest technology to monitor machine operation and status, giving you advice to increase your profitability. By having a Customer Support Agreement you are in control of your service costs.

Volvo EC160E in detail.

Engine

The latest generation of Volvo Tier 4 Final diesel engines fully meets the demands of the latest, emissions regulations. Featuring Volvo Advanced Combustion Technology (V-ACT), it is designed to deliver superior performance and fuel efficiency. The engine uses precise, high pressure fuel injectors, turbo charger and air-to-air intercooler, and electronic engine controls to optimize machine performance.

The Automatic Idling System reduces engine speed to idle when the levers and pedals are not activated resulting in less fuel consumption and low cab noise levels.

| | | |
|----------------------------|-------------------|----------|
| Engine | Volvo | D4J |
| Max power at | r/min | 2,000 |
| Net, ISO 9249/SAE J1349 | kW hp | 109 146 |
| Gross, ISO 14396/SAE J1995 | kW hp | 110 148 |
| Max power | Nm lbf ft | 609 449 |
| at engine speed | r/min | 1,600 |
| No. of cylinders | | 4 |
| Displacement | l in ³ | 4.04 247 |
| Bore | mm in | 101 3.98 |
| Stroke | mm in | 126 4.96 |

Electrical system

Well protected high-capacity electrical system. Waterproof double-lock harness plugs are used to secure corrosion-free connections. The main relays and solenoid valves are shielded to prevent damage. The master switch is standard. Contronics provides advanced monitoring of machine functions and important diagnostic information.

| | | |
|------------------|--------|---------|
| Voltage | V | 24 |
| Batteries | V | 2 x 12 |
| Battery capacity | Ah | 100 |
| Alternator | V / Ah | 28 / 80 |

Service refill capacities

| | | |
|-------------------------|-------|---------------|
| Fuel tank | l gal | 250 66 |
| Hydraulic system, total | l gal | 255 67 |
| Hydraulic tank | l gal | 110 29 |
| DEF tank | l gal | 20 5 |
| Engine oil | l gal | 16 4 |
| Engine coolant | l gal | 27 7 |
| Swing reduction unit | l gal | 2.6 0.7 |
| Travel reduction unit | l gal | 2 x 5.8 2 x 2 |

Swing system

The swing system uses an axial piston motors, driving a planetary gearbox for maximum torque. An automatic holding brake and anti-rebound valve are standard.

| | | |
|------------------|------------|-------------|
| Max. slew speed | r/min | 12.5 |
| Max. slew torque | kNm lbf ft | 51.7 38,130 |

Drive

Each track is powered by an automatic two-speed shift travel motor. The track brakes are multi-disc, spring-applied and hydraulic released. The travel motor, brake and planetary gears are well protected within the track frame.

| | | |
|-------------------|----------|---------------------|
| Max. drawbar pull | kN lbf | 152 34,180 |
| Max. travel speed | km/h mph | 3.1 / 5.6 1.9 / 3.5 |
| Gradeability | | 35 |

Undercarriage

Robust X-shaped frame with greased and sealed track chains as standard.

| | | |
|----------------------------|-------|---------|
| Track shoe | | 2 x 44 |
| Link pitch | mm in | 190 7.5 |
| | | 500 20 |
| | | 600 24 |
| Shoe width, triple grouser | mm in | 700 28 |
| | | 800 32 |
| | | 900 36 |

| | | |
|----------------|--|-------|
| Bottom rollers | | 2 x 7 |
| Top rollers | | 2 x 2 |

Hydraulic system

The hydraulics system, combined with the fully electronic control system and advanced ECO mode, has been optimized to work in harmony with engine to match the engine power, reduce power loss and improve controllability and response time.

The following important functions are included in the system:

Summation system: Combines the flow of both hydraulic pumps to ensure quick cycle times and high productivity.

Arm priority: Gives priority to the arm operation for faster cycle times in leveling and for increased bucket filling when digging.

Swing priority: Gives priority to swing functions for faster simultaneous operations.

Regeneration system: Prevents cavitation and provides flow to other movements during simultaneous operations for maximum productivity.

Power boost: All digging and lifting forces are increased.

Holding valves: Boom and arm holding valves prevent the digging equipment from creeping.

Main pump

| | | | | |
|--------------|--|-----|---------|--------|
| Type | 2 x variable displacement axial piston pumps | | | |
| Maximum flow | l/min | gpm | 2 x 152 | 2 x 40 |

Pilot pump

| | | | | |
|--------------|-----------|-----|--------|-------|
| Type | Gear pump | | | |
| Maximum flow | l/min | gpm | 1 x 20 | 1 x 5 |

Relief valve setting

| Implement | MPa | psi | 34.3 | 4,980 |
|----------------|-----|-----|------|-------|
| Standard | MPa | psi | 34.3 | 4,980 |
| Power Boost | MPa | psi | 36.3 | 5,260 |
| Travel circuit | MPa | psi | 34.3 | 4,980 |
| Slew circuit | MPa | psi | 26.5 | 3,840 |
| Pilot circuit | MPa | psi | 3.9 | 570 |

Hydraulic motors

Travel: Variable displacement axial piston motor with mechanical brake

Slew: Fixed displacement axial piston motor with mechanical brake

Hydraulic cylinders

| | | | |
|---------------|--------|---------|------|
| Mono boom | | | 2 |
| Bore x Stroke | ø x mm | 115 x 1 | 165 |
| | ø x in | 4.5 x | 45.9 |
| Arm | | | 1 |
| Bore x Stroke | ø x mm | 120 x 1 | 345 |
| | ø x in | 4.7 x | 53.0 |
| Bucket | | | 1 |
| Bore x Stroke | ø x mm | 105 x 1 | 000 |
| | ø x in | 4.1 x | 39.4 |
| Dozer blade | | | 2 |
| Bore x Stroke | ø x mm | 140 x | 320 |
| | ø x in | 5.5 x | 12.6 |

Cab

The operator's cab has easy access via a wide door opening. The cab is supported on hydraulic dampening mounts to reduce shock and vibration levels. These along with a sound absorbing lining provide low noise levels. The cab has excellent all-round visibility. The front windshield can easily slide up into the ceiling, and the lower front glass can be removed and stored in the side door.

Integrated air-conditioning and heating system: The pressurized and filtered cab air is supplied by an automatically-controlled fan. The air is distributed throughout the cab from 14 vents.

Ergonomic operator's seat: The adjustable seat and joystick console move independently to accommodate the operator.


The seat has nine different adjustments plus a seat belt for the operator's comfort and safety.

Sound Level

| | | |
|---|-------|-----|
| Sound level in cab according to ISO 6396 | | |
| LpA (standard) | dB(A) | 69 |
| LpA (tropical) | dB(A) | 70 |
| External sound level according to ISO 6395, EU Noise Directive (2000/14/EC) | | |
| LwA (standard) | dB(A) | 101 |
| LwA (tropical) | dB(A) | 102 |


Specifications.

DIMENSIONS

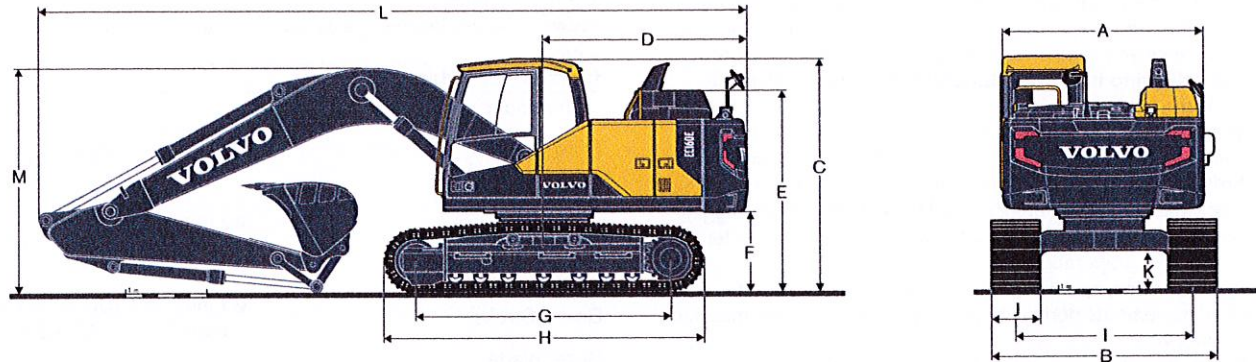

| Description | Unit | | EC160EL | | | | | |
|------------------------------------|----------|-------|-------------|--------|-------|--------|-------|---------|
| | m, ft in | | 5.2, 17' 1" | | | | | |
| Mono boom | m | ft in | 2.3 | 7' 7" | 2.6 | 8' 6" | 3.0 | 9' 10" |
| Arm | | | | | | | | |
| A Overall width of upper structure | mm | ft in | 2 490 | 8' 2" | 2 490 | 8' 2" | 2 490 | 8' 2" |
| B Overall width | mm | ft in | 2 590 | 8' 6" | 2 590 | 8' 6" | 2 590 | 8' 6" |
| C Overall height of cab | mm | ft in | 2 900 | 9' 6" | 2 900 | 9' 6" | 2 900 | 9' 6" |
| D Tail swing radius | mm | ft in | 2 550 | 8' 4" | 2 550 | 8' 4" | 2 550 | 8' 4" |
| E Overall height of engine hood | mm | ft in | 2 510 | 8' 3" | 2 510 | 8' 3" | 2 510 | 8' 3" |
| F Counterweight clearance* | mm | ft in | 1 010 | 3' 4" | 1 010 | 3' 4" | 1 010 | 3' 4" |
| G Tumbler length | mm | ft in | 3 180 | 10' 5" | 3 180 | 10' 5" | 3 180 | 10' 5" |
| H Track length | mm | ft in | 3 980 | 13' 1" | 3 980 | 13' 1" | 3 980 | 13' 1" |
| I Track gauge | mm | ft in | 1 990 | 6' 6" | 1 990 | 6' 6" | 1 990 | 6' 6" |
| J Shoe width | mm | ft in | 600 | 2' 0" | 600 | 2' 0" | 600 | 2' 0" |
| K Min. ground clearance* | mm | ft in | 460 | 1' 6" | 460 | 1' 6" | 460 | 1' 6" |
| L Overall length | mm | ft in | 8 880 | 29' 2" | 8 770 | 28' 9" | 8 810 | 28' 11" |
| M Overall height of boom | mm | ft in | 2 980 | 9' 9" | 2 900 | 9' 6" | 3 020 | 9' 11" |


* Without shoe grouser

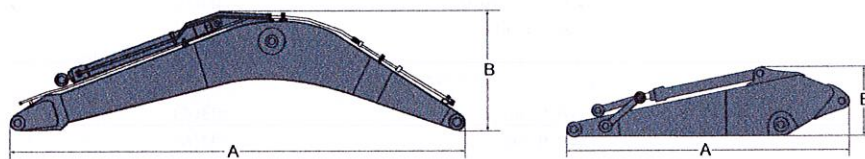


| Description | Unit | | mono | | Description | Unit | | EC160EL | | | | | |
|-------------|------|-------|-------|--------|-------------|------|-------|---------|--------|-------|--------|-------|---------|
| | m | ft in | 5.2 | 17' 1" | | m | ft in | 2.3 | 7' 7" | 2.6 | 8' 6" | 3.0 | 9' 10" |
| Boom | | | | | Arm | | | | | | | | |
| A Length | mm | ft in | 5 400 | 17' 9" | A Length | mm | ft in | 3 240 | 10' 8" | 3 500 | 11' 6" | 3 900 | 12' 10" |
| B Height | mm | ft in | 1 640 | 5' 5" | B Height | mm | ft in | 855 | 2' 10" | 855 | 2' 10" | 845 | 2' 9" |
| Width | mm | ft in | 565 | 1' 10" | Width | mm | ft in | 395 | 1' 4" | 395 | 1' 4" | 395 | 1' 4" |
| Weight | kg | lb | 1 370 | 3,020 | Weight | kg | lb | 790 | 1,740 | 800 | 1,760 | 860 | 1,900 |

* Includes cylinder, piping and pin, excludes boom cylinder pin * Includes cylinder, linkage and pin

| Front dozer blade | | Unit | |
|-------------------|----|-------|-------------|
| A Height | mm | ft in | 452 1' 6" |
| Width | mm | ft in | 2 590 8' 6" |
| Weight | kg | lb | 553 1,220 |
| B Lift height | mm | ft in | 571 1' 10" |
| C Digging depth | mm | ft in | 735 2' 5" |



WORKING RANGES

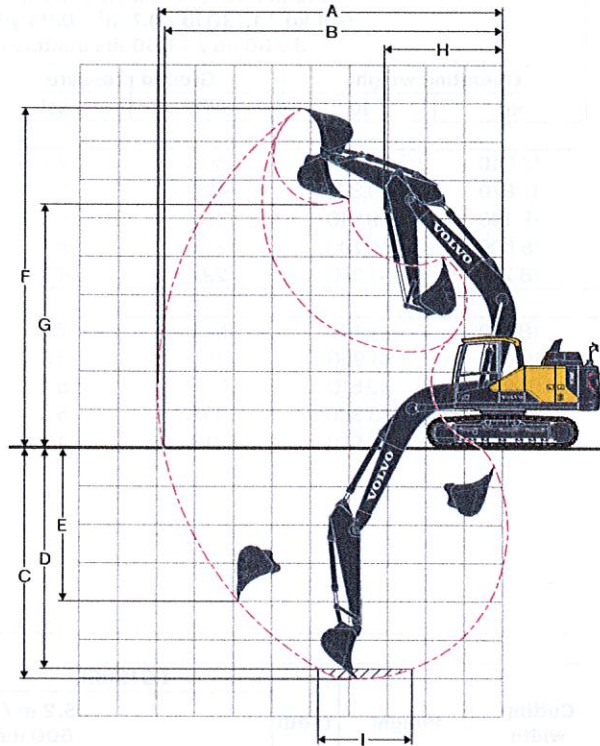

| Description | | Unit | | EC160EL | | | | | |
|-------------|--|----------|-------|------------------|---------|-------|---------|-------|--------|
| | | m, ft in | | 5.2, 17' 1" mono | | | | | |
| Arm | | m | ft in | 2.3 | 7' 7" | 2.6 | 8' 6" | 3.0 | 9' 10" |
| A | Max. digging reach | mm | ft in | 8 660 | 28' 5" | 8 980 | 29' 6" | 9 350 | 30' 8" |
| B | Max. digging reach on ground | mm | ft in | 8 500 | 27' 11" | 8 820 | 28' 11" | 9 200 | 30' 2" |
| C | Max. digging depth | mm | ft in | 5 770 | 18' 11" | 6 070 | 19' 11" | 6 470 | 21' 3" |
| D | Max. digging depth (2.44 m / 8' level) | mm | ft in | 5 470 | 17' 11" | 5 810 | 19' 1" | 6 240 | 20' 6" |
| E | Max. vertical wall digging depth | mm | ft in | 4 510 | 14' 10" | 4 990 | 16' 4" | 5 410 | 17' 9" |
| F | Max. cutting height | mm | ft in | 8 560 | 28' 1" | 8 820 | 28' 11" | 9 030 | 29' 8" |
| G | Max. dumping height | mm | ft in | 6 080 | 19' 11" | 6 310 | 20' 8" | 6 510 | 21' 4" |
| H | Min. front swing radius | mm | ft in | 3 070 | 10' 1" | 3 070 | 10' 1" | 3 070 | 10' 1" |

DIGGING FORCES WITH DIRECT FIT BUCKET

| Bucket radius | | mm | | ft in | | 1 319 | | 4' 4" | | |
|----------------------------|-------------|-----------|----|-------|-------|--------|-------|--------|-------|--------|
| Breakout force - bucket | Normal | SAE J1179 | kN | lbf | 101.5 | 22,810 | 101.5 | 22,810 | 101.5 | 22,820 |
| | Power boost | SAE J1179 | kN | lbf | 107.3 | 24,110 | 107.3 | 24,120 | 107.3 | 24,130 |
| | Normal | ISO 6015 | kN | lbf | 115.3 | 25,910 | 115.3 | 25,920 | 115.3 | 25,930 |
| Tearout force - dipper arm | Power boost | ISO 6015 | kN | lbf | 121.9 | 27,390 | 121.9 | 27,400 | 121.9 | 27,410 |
| | Normal | SAE J1179 | kN | lbf | 90.0 | 20,230 | 80.0 | 17,980 | 72.5 | 16,290 |
| | Power boost | SAE J1179 | kN | lbf | 95.1 | 21,390 | 84.6 | 19,010 | 76.6 | 17,220 |
| Rotation angle, bucket | Normal | ISO 6015 | kN | lbf | 92.2 | 20,730 | 81.7 | 18,370 | 73.8 | 16,600 |
| | Power boost | ISO 6015 | kN | lbf | 97.5 | 21,910 | 86.4 | 19,420 | 78.1 | 17,550 |
| | | ° | | 183 | | 183 | | 183 | | |

Specifications.

MACHINE WEIGHTS AND GROUND PRESSURE

| EC160EL | | 5.2 m / 17' 1" boom, 2.6 m / 8' 6" arm, 514 kg / 1,130 lb - 0.7 m ³ / 0.93 yd ³ bucket, 3 200 kg / 7,060 lb counterweight | | | | | | |
|----------------------------|------------|---|------------------|--------|-----------------|-----|---------------|--------|
| Description | Shoe width | | Operating weight | | Ground pressure | | Overall width | |
| | mm | in | kg | lb | kPa | psi | mm | in |
| Without dozer blade | | | | | | | | |
| Triple grouser | 500 | 20 | 17 640 | 38,890 | 50.0 | 7.3 | 2 490 | 8' 2" |
| | 600 | 24 | 17 870 | 39,390 | 42.2 | 6.1 | 2 590 | 8' 6" |
| | 700 | 28 | 18 100 | 39,910 | 36.3 | 5.3 | 2 690 | 8' 10" |
| | 800 | 32 | 18 500 | 40,790 | 32.4 | 4.7 | 2 790 | 9' 2" |
| | 900 | 36 | 18 760 | 41,370 | 29.4 | 4.3 | 2 990 | 9' 10" |
| With dozer blade | | | | | | | | |
| Triple grouser | 500 | 20 | 18 810 | 41,480 | 53.0 | 7.7 | 2 490 | 8' 2" |
| | 600 | 24 | 19 040 | 41,990 | 45.1 | 6.5 | 2 590 | 8' 6" |
| | 700 | 28 | 19 280 | 42,510 | 39.2 | 5.7 | 2 690 | 8' 10" |
| | 800 | 32 | 19 675 | 43,380 | 35.3 | 5.1 | 2 790 | 9' 2" |
| | 900 | 36 | 19 940 | 43,970 | 31.4 | 4.6 | 2 990 | 9' 10" |

BUCKET SELECTION GUIDE

| Bucket type | | Capacity | | Cutting width | | Weight | | Teeth | EC160EL | | | EC160EL with dozer blade | | |
|--------------------|-----------------|----------------|-----------------|---------------|-------|--------|-------|-------|---|-------------------|--------------------|--------------------------|-------------------|--------------------|
| | | | | | | | | | 5.2 m / 17' 1" boom, 600 mm / 24" shoe, 3 200 kg / 7,060 lb counterweight | | | | | |
| | | m ³ | yd ³ | mm | ft | kg | lb | EA | 2.3 m / 7' 7" arm | 2.6 m / 8' 6" arm | 3.0 m / 9' 10" arm | 2.3 m / 7' 7" arm | 2.6 m / 8' 6" arm | 3.0 m / 9' 10" arm |
| Direct fit Buckets | General purpose | 0.30 | 0.39 | 450 | 17.72 | 390 | 861 | 3 | C | C | C | C | C | C |
| | | 0.36 | 0.47 | 600 | 23.62 | 417 | 919 | 3 | C | C | C | C | C | C |
| | | 0.46 | 0.60 | 750 | 29.53 | 450 | 992 | 3 | C | C | C | C | C | C |
| | | 0.58 | 0.76 | 900 | 35.43 | 505 | 1,114 | 4 | C | C | C | C | C | C |
| | | 0.70 | 0.92 | 1050 | 41.34 | 550 | 1,213 | 4 | C | C | C | C | C | C |
| | Heavy duty | 0.84 | 1.10 | 1200 | 47.24 | 618 | 1,362 | 5 | C | C | C | C | C | C |
| | | 0.30 | 0.39 | 450 | 17.72 | 382 | 841 | 3 | D | D | D | D | D | D |
| | | 0.36 | 0.47 | 600 | 23.62 | 409 | 903 | 3 | D | D | D | D | D | D |
| | | 0.46 | 0.60 | 750 | 29.53 | 444 | 979 | 3 | D | D | D | D | D | D |
| | | 0.58 | 0.76 | 900 | 35.43 | 511 | 1,126 | 4 | D | D | D | D | D | D |

Please consult with your Volvo dealer for the proper match of buckets and attachments to suit the application. The recommendations are given as a guide only, based on typical operation conditions. Bucket capacity based on ISO 7451, heaped material with a 1:1 angle of repose.

Maximum material density

| | kg/m ³ | lb/yd ³ | |
|---|-------------------|--------------------|--|
| A | 1 200 - 1 300 | 2,000 - 2,200 | Coal, Caliche, Shale |
| B | 1 400 - 1 600 | 2,300 - 2,700 | Wet earth and clay, Limestone, Sandstone |
| C | 1 700 - 1 800 | 2,800 - 3,100 | Granite, Wet sand, Well blasted rock |
| D | > 1 900 | > 3,200 | Wet mud, Iron ore |

LIFTING CAPACITY EC160EL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

| | Lifting hook related to ground level | 1.5 m, 5 ft | | 3.0 m, 10 ft | | 4.5 m, 15 ft | | 6.0 m, 20 ft | | 7.5 m, 25 ft | | Max. Reach | | |
|---|--|-------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|------------|-----------|---------|
| | | Along UC | Across UC | Along UC | Across UC | Along UC | Across UC | Along UC | Across UC | Along UC | Across UC | Along UC | Across UC | |
| Boom: 5.2 / 17' 1" Arm: 2.3 m / 7' 7" Shoe: 600 mm / 24' CWT: 3 200 kg / 7,060 lb | 6.0 m kg | - | - | - | - | - | - | - | - | - | - | *4 480 | 3 650 | 5.9 m |
| | 20 ft lb | - | - | - | - | - | - | - | - | - | - | *9,860 | 8,220 | 19.0 ft |
| | 4.5 m kg | - | - | - | - | *4 970 | *4 970 | *4 660 | 3 480 | - | - | 4 490 | 2 880 | 6.8 m |
| | 15 ft lb | - | - | - | - | *10,770 | *10,770 | *10,230 | 7,500 | - | - | 9,990 | 6,400 | 22.1 ft |
| | 3.0 m kg | - | - | - | - | *6 580 | 5 050 | 5 290 | 3 340 | - | - | 3 990 | 2 530 | 7.2 m |
| | 10 ft lb | - | - | - | - | *14,180 | 10,920 | 11,400 | 7,220 | - | - | 8,810 | 5,610 | 23.6 ft |
| | 1.5 m kg | - | - | - | - | 7 920 | 4 730 | 5 130 | 3 200 | - | - | 3 820 | 2 410 | 7.3 m |
| | 5 ft lb | - | - | - | - | 17,060 | 10,230 | 11,050 | 6,910 | - | - | 8,420 | 5,310 | 24.1 ft |
| | 0 m kg | - | - | - | - | 7 720 | 4 560 | 5 010 | 3 100 | - | - | 3 920 | 2 450 | 7.1 m |
| | 0 ft lb | - | - | - | - | 16,610 | 9,850 | 10,800 | 6,690 | - | - | 8,640 | 5,410 | 23.4 ft |
| | -1.5 m kg | - | - | *10 820 | 8 360 | 7 670 | 4 520 | 4 970 | 3 060 | - | - | 4 360 | 2 710 | 6.6 m |
| | -5 ft lb | - | *24,720 | 17,960 | 16,500 | 9,750 | 10,730 | 6,620 | - | - | - | 9,650 | 6,000 | 21.6 ft |
| | -3.0 m kg | - | - | *13 000 | 8 500 | 7 750 | 4 590 | - | - | - | - | 5 590 | 3 430 | 5.6 m |
| | -10 ft lb | - | *28,150 | 18,280 | 16,670 | 9,900 | - | - | - | - | - | 12,470 | 7,650 | 18.2 ft |
| | Boom: 5.2 / 17' 1" Arm: 2.6 m / 8' 6" Shoe: 600 mm / 24' CWT: 3 200 kg / 7,060 lb | 7.5 m kg | - | - | - | - | - | - | - | - | - | - | *4 110 | *4 110 |
| 25 ft lb | | - | - | - | - | - | - | - | - | - | - | *9,050 | *9,050 | 15.4 ft |
| 6.0 m kg | | - | - | - | - | - | - | *4 150 | 3 570 | - | - | *3 760 | 3 320 | 6.3 m |
| 20 ft lb | | - | - | - | - | - | - | *9,030 | 7,680 | - | - | *8,320 | 7,460 | 20.3 ft |
| 4.5 m kg | | - | - | - | - | *4 570 | *4 570 | *4 390 | 3 510 | - | - | *3 680 | 2 680 | 7.1 m |
| 15 ft lb | | - | - | - | - | *9,930 | *9,930 | *9,630 | 7,570 | - | - | *8,130 | 5,960 | 23.2 ft |
| 3.0 m kg | | - | - | *9 730 | 9 330 | *6 190 | 5 120 | *5 090 | 3 370 | 3 770 | 2 400 | 3 750 | 2 380 | 7.5 m |
| 10 ft lb | | - | - | *20,590 | 20,160 | *13,350 | 11,060 | *11,080 | 7,280 | - | - | 8,280 | 5,280 | 24.7 ft |
| 1.5 m kg | | - | - | - | - | *7 930 | 4 780 | 5 150 | 3 220 | 3 700 | 2 340 | 3 600 | 2 270 | 7.7 m |
| 5 ft lb | | - | - | - | - | *17,130 | 10,320 | 11,090 | 6,940 | 7,980 | 5,040 | 7,930 | 5,010 | 25.1 ft |
| 0 m kg | | - | - | *5 620 | *5 620 | 7 740 | 4 570 | 5 020 | 3 100 | - | - | 3 680 | 2 300 | 7.5 m |
| 0 ft lb | | - | - | *13,000 | *13,000 | 16,640 | 9,870 | 10,820 | 6,690 | - | - | 8,110 | 5,090 | 24.5 ft |
| -1.5 m kg | | *5 790 | *5 790 | *9 910 | 8 310 | 7 660 | 4 510 | 4 960 | 3 050 | - | - | 4 050 | 2 520 | 6.9 m |
| -5 ft lb | | *12,980 | *12,980 | *22,600 | 17,860 | 16,470 | 9,730 | 10,700 | 6,590 | - | - | 8,950 | 5,580 | 22.7 ft |
| -3.0 m kg | | *10 330 | *10 330 | *13 460 | 8 440 | 7 710 | 4 550 | - | - | - | - | 5 020 | 3 100 | 6.0 m |
| -10 ft lb | *23,240 | *23,240 | *29,140 | 18,140 | 16,590 | 9,830 | - | - | - | - | 11,180 | 6,900 | 19.5 ft | |
| -4.5 m kg | - | - | *10 810 | 8 720 | - | - | - | - | - | - | *7 450 | 4 980 | 4.4 m | |
| -15 ft lb | - | - | *23,080 | 18,790 | - | - | - | - | - | - | *16,540 | 11,410 | 13.9 ft | |
| Boom: 5.2 / 17' 1" Arm: 3.0 m / 9' 10" Shoe: 600 mm / 24' CWT: 3 200 kg / 7,060 lb | 7.5 m kg | - | - | - | - | - | - | - | - | - | - | *3 470 | *3 470 | 5.4 m |
| | 25 ft lb | - | - | - | - | - | - | - | - | - | - | *7,760 | *7,760 | 17.3 ft |
| | 6.0 m kg | - | - | - | - | - | - | *3 660 | 3 610 | - | - | *3 170 | 2 980 | 6.7 m |
| | 20 ft lb | - | - | - | - | - | - | *8,160 | 7,750 | - | - | *7,010 | 6,680 | 21.8 ft |
| | 4.5 m kg | - | - | - | - | - | - | *3 990 | 3 530 | - | - | *3 110 | 2 450 | 7.5 m |
| | 15 ft lb | - | - | - | - | - | - | *8,740 | 7,600 | - | - | *6,850 | 5,450 | 24.5 ft |
| | 3.0 m kg | - | - | *8 200 | *8 200 | *5 610 | 5 160 | *4 720 | 3 370 | 3 770 | 2 390 | *3 200 | 2 190 | 7.9 m |
| | 10 ft lb | - | - | *17,400 | *17,400 | *12,100 | 11,150 | *10,290 | 7,280 | 8,110 | 5,150 | *7,050 | 4,850 | 25.9 ft |
| | 1.5 m kg | - | - | *5 660 | *5 660 | *7 430 | 4 790 | 5 140 | 3 200 | 3 680 | 2 310 | 3 330 | 2 090 | 8.0 m |
| | 5 ft lb | - | - | *13,630 | *13,630 | *16,040 | 10,350 | 11,070 | 6,910 | 7,940 | 4,990 | 7,340 | 4,610 | 26.3 ft |
| | 0 m kg | - | - | *6 130 | *6 130 | 7 720 | 4 550 | 4 990 | 3 070 | 3 610 | 2 250 | 3 390 | 2 110 | 7.8 m |
| | 0 ft lb | - | - | *14,100 | *14,100 | 16,590 | 9,810 | 10,750 | 6,620 | 7,790 | 4,850 | 7,480 | 4,660 | 25.7 ft |
| | -1.5 m kg | *5 290 | *5 290 | *9 280 | 8 190 | 7 600 | 4 450 | 4 910 | 3 000 | - | - | 3 690 | 2 290 | 7.3 m |
| | -5 ft lb | *11,850 | *11,850 | *21,140 | 17,600 | 16,330 | 9,590 | 10,580 | 6,470 | - | - | 8,160 | 5,060 | 24.1 ft |
| | -3.0 m kg | *8 980 | *8 980 | *13 880 | 8 290 | 7 620 | 4 460 | 4 920 | 3 010 | - | - | 4 440 | 2 740 | 6.5 m |
| -10 ft lb | *20,200 | *20,200 | *30,040 | 17,810 | 16,380 | 9,630 | 10,630 | 6,510 | - | - | 9,870 | 6,090 | 21.1 ft | |
| -4.5 m kg | - | - | *11 770 | 8 530 | 7 790 | 4 610 | - | - | - | - | 6 650 | 4 010 | 5.0 m | |
| -15 ft lb | - | - | *25,240 | 18,360 | 16,780 | 9,970 | - | - | - | - | 15,120 | 9,100 | 16.0 ft | |

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

Equipment.

STANDARD EQUIPMENT

Engine

Turbocharged, 4 stroke diesel engine with water cooling, direct injection and charged air cooler that meets Tier 4f EU (Stage IV) requirements
Air filter with indicator
Air intake heater
Cyclone pre-cleaner
Electric engine shut-off
Fuel filter and water separator
Tropical cooling system
Alternator, 80 A

Electric/Electronic control system

Contronics
Advanced mode control system
Self-diagnostic system
Machine status indication
Satellite Caretrack and Caretrack subscription
Engine speed sensing power control
Automatic idling system
One-touch power boost
Safety stop/start function
Adjustable LCD color monitor
Master electrical disconnect switch
Engine restart prevention circuit
Travel alarm
High-capacity halogen lights:
Frame-mounted: 2, Boom-mounted: 1
Batteries, 2 x 12 V / 100 Ah
Start motor, 24 V / 5.5 kW

Hydraulic system

Boom float function without HRV
Automatic sensing hydraulic system
Summation system
Boom priority
Arm priority
Swing priority
ECO mode fuel saving technology
Boom, arm and bucket regeneration valves
Swing anti-rebound valves
Boom and arm holding valves
Multi-stage filtering system
Boom cylinders (x2)
Cylinder cushioning
Cylinder contamination seals
Auxiliary hydraulic valve
Automatic two-speed travel motors
Pilot control pattern change
Hydraulic oil, ISO oil 46

Frame

Access way with handrail
Tool storage area
Punched metal anti-slip plates
Heavy duty lower cover plates
3 200 kg, 7,060 lb counterweight

Cab and interior

ROPS (ISO12117-2) certified cab with openable roof hatch
Silicon oil and rubber mounts with spring
Control lock out lever
Travel pedals and hand levers
Straight travel pedal
Adjustable operator seat with heater
Control joysticks with 4 switches each
Heater & air-conditioner, automatic
Flexible antenna
Radio with AUX, USB Jack and Bluetooth
Cab, all-weather sound suppressed, includes:
Cup holders
Door locks
Tinted glass
Floor mat
Horn
Large storage area
Pull-up type front window
Removable lower windshield
Seat belt
Safety glass
Sun screens, front, roof, rear
Windshield wiper with intermittent feature
Rear view camera
Master key

Undercarriage

Heavy Duty belly cover plates
Hydraulic track adjusters
Greased and sealed track link
Track Guard

Digging equipment

5.2 m / 17' 1" mono boom
2.6 m / 8' 6" arm
Reinforced linkage
Manual centralized lubrication

OPTIONAL EQUIPMENT

Engine

Block heater: 120 V
Diesel coolant heater, 5 kW
Water separator with heater
Auto engine shutdown
Standard cooling system
Fuel filler pump: 35 l/min / 9 gpm

Electric

High-capacity LED lights:
Frame-mounted: 2, Boom-mounted: 1
Extra work lights (Halogen or LED):
Boom-mounted 1
Cab-mounted 3
Counterweight-mounted 1
Anti-theft system
Rotating warning beacon

OPTIONAL EQUIPMENT

Hydraulic system

Boom hose rupture valve with overload warning device
Arm hose rupture valve
Boom float function with HRV
Hydraulic piping:
Work tool management system (up to 20 programmable memorized settings)
Breaker & shear, 1 or 2 pump flow
Slope & rotator (40 lpm, 11 gpm or 60 lpm, 16 gpm)
Extra for slope & rotator
Grapple
Oil leak (drain) line
Quick coupler
Additional return filter
Breaker & shear pressure pre-setting
Volvo hydraulic quick coupler S1, S6
Volvo hydraulic quick coupler VQC-HU,DR16
Hydraulic oil, biodegradable 46
Hydraulic oil, longlife oil 32, 68

Cab and interior

ROPS (ISO12117-2) certified cab with fixed hatch
Fabric seat without heater
Fabric seat with heater and air suspension
Control joysticks with semi-long
Control joysticks with 3 switch & 1 proportional
Cab-mounted falling object guard (FOG)
Cab-mounted falling object protective structure (FOPS)
Anti-vandalism kit
Safety net for front window
Side view camera
Smoker kit (ashtray and lighter)
Sunlight protection, roof (steel)
Lower wiper with intermittent control
Rain shield
Specific key

Undercarriage

Dozer blade
500 mm, 20"/600 mm, 24"/700 mm, 28"/800 mm,
32"/900 mm, 36" shoe with triple grousers

Digging equipment

2.3 m/7' 7", 3.0 m/9' 10" arm
Linkage with lifting eye

Service

Tool kit, daily maintenance
Tool kit, full scale

Selection of Volvo optional equipment

Auto engine shutdown



Two-piece boom




Diesel coolant heater



LED lights




Fuel filler pump

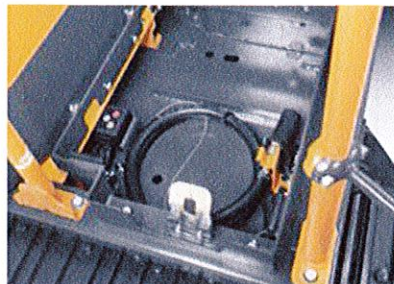

Falling Objects Guard (FOG)



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

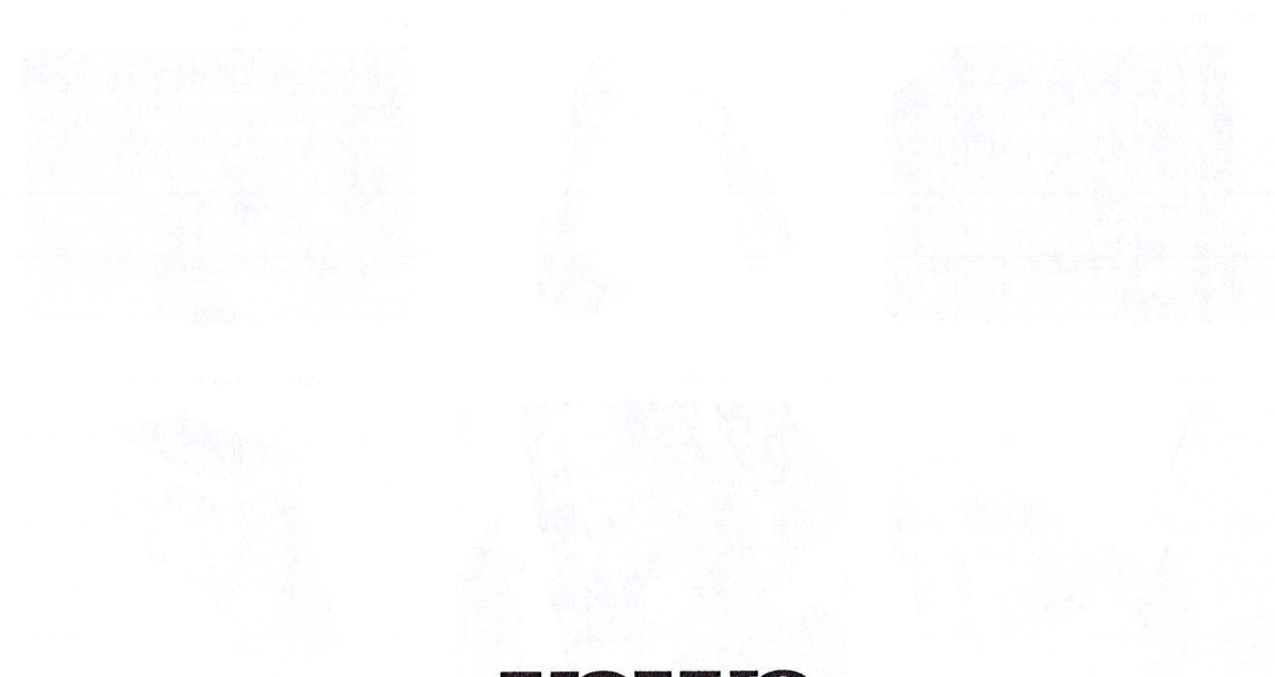

VOLVO

Volvo Construction Equipment

www.volvoce.com

VOLVO

Volvo Construction Equipment North America Warranty – Disclaimers – Limitations Limited Warranty for Governmental / Municipalities

Volvo Construction Equipment North America (“Volvo CE”) hereby extends to its authorized dealers (“Dealer”) and the Dealer’s Governmental / Municipalities customers (“Customer”, and both Dealer and Customer are referred to herein as a “Buyer”), who purchase a new Volvo construction equipment machine (“Machine”) or new Volvo part (“Part”, both of which are referred to herein as a “Product”) from Volvo, the following limited warranty:

Subject to the exceptions and limitations set forth below, Volvo CE or Dealer will repair or replace any part of a new Machine or new Part which proves to be defective in material or workmanship during the following periods (the “Warranty Period”):

- Volvo wheel loaders: 12 months/2500 hours, whichever first occurs
- Volvo articulated haulers: 12 months/2500 hours, whichever first occurs
- Volvo hydraulic excavators: 12 months/2500 hours, whichever first occurs
- Volvo motor graders: 12 months/2500 hours, whichever first occurs
- Volvo compactors: 12 months/1500 hours, whichever first occurs
24 months unlimited hours on DD90 and larger compactors
- Volvo pavers: 12 months/1500 hours, whichever first occurs
24 months unlimited hours on 6000 / 7000 series pavers
- Volvo milling: 12 months/1500 hours, whichever first occurs
- Volvo compact wheel loaders (up to 100 net hp.): 12 months/unlimited hours
- Volvo skid steer loaders: 12 months/unlimited hours; Lifetime arm for one-sided
- Volvo compact hydraulic excavators (less than 11 metric tons): 12 months/unlimited hours
- Volvo backhoe loaders: 12 months/unlimited hours
- Volvo engines: 12 months/2500 hours, whichever first occurs
- Volvo parts: 6 months/1500 hours, whichever first occurs
- Volvo remanufactured components: 12 months/2500 hours, whichever first occurs
- Volvo Attachments: 12 months

The Warranty Period commences immediately following the delivery of said Product to the Buyer who first puts said Product into use. The foregoing limited warranty shall include the labor cost to accomplish the repair or replacement of the defective part provided that the repair or replacement was performed by a Dealer.

The foregoing warranty does not cover: (i) any Product found to have been damaged by abuse, accident, other casualty or a failure to maintain or use the warranted Product in accordance with the applicable manuals or instructions (Buyer is required to use only original equipment manufacturer filters during the Warranty Period); (ii) the labor costs to repair or replace defective Parts after the expiration of the Warranty Period of the Machine in which such Part is located; (iii) overtime labor premiums; (iv) costs and expenses associated with the transportation of Dealer’s service personnel to and from the location of the warranted Product; (v) any parts, components, attachments or accessories for which Buyer receives a separate warranty by the manufacturer or producer thereof (in specified cases said warranty may be administered by Volvo CE); (vi) maintenance items or ground engaging parts that have achieved their normal service life.

DISCLAIMER OF IMPLIED WARRANTIES AND LIMITATION OF REMEDIES

THE FOREGOING WARRANTY TO BUYER IS EXCLUSIVE AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND THERE IS NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

REMEDIES AVAILABLE TO BUYER ARE LIMITED TO MAKING A CLAIM UNDER THE FOREGOING WARRANTY AND ARE EXCLUSIVE AND EXPRESSLY LIMITED TO OBTAINING THE PARTS AND LABOR IN ACCORDANCE WITH THE TERMS OF SAID WARRANTY.

Warranty – Disclaimers – Limitations

LIMITATIONS OF LIABILITY AND DAMAGES

Regardless of whether a claim against Volvo CE or Dealer is based on the foregoing warranty or is an action in contract, tort (negligence or strict liability) or otherwise, their respective liability for losses, damages or expenses of any kind arising from the design, manufacture, repair or sale of the Products is limited, unless otherwise prohibited by law, to an amount not exceeding the cost performing the obligations contained in the foregoing warranty, and in no event shall their respective or joint liability exceed the value of the Product or part thereof giving rise to such liability.

CONSEQUENTIAL AND SIMILAR DAMAGES NOT RECOVERABLE

Except for performing the obligations of the foregoing warranty in accordance with its terms, Volvo CE and Dealer shall have no liability for loss, damage, or expense, directly or indirectly, attributable to a loss of use of a Product, loss or damage to property other than the Product, loss or damage to the Product or any part thereof or any other economic or commercial loss, including, without limitation, lost profits or special or consequential damages (except liability for any type of consequential damages which by law may not be disclaimed). The parties intend that this prohibition against consequential and similar damages will survive and be effective even if the limitation of remedies in the foregoing sections is found to fail of its essential purpose under section 2-719 of the Uniform Commercial Code.

ALLOCATION OF RISK

The foregoing warranty disclaimers, limitations of liability and limitation of remedies are bargained allocations of risks among (i) the Customer who purchased the Product; (ii) the Dealer who sold the Product, and (iii) Volvo CE, which is a third party beneficiary of the contract of sale between the Customer and the Dealer. The Buyer of the Product accepts the foregoing warranty and the other bargained for allocations of risk as part of the agreed price for the purchase of the Product to which the foregoing warranty applies. Volvo CE is prepared to offer different warranties and other allocations of risk for other prices. However, any such change in the warranty or the allocation of risks must be confirmed in writing by Volvo CE.

STATUTE OF LIMITATIONS

Any action by a Buyer of a Product for breach of contract, for breach of warranty arising under, or for a cause of action arising out of the sale of a Product, whether based on contract, tort (negligence or strict liability) or otherwise, shall be commenced within one (1) year after the cause of action has accrued. Any such cause of action shall be deemed to have accrued at the earlier of (i) the discovery of the defect or breach, or (ii) the expiration of the applicable Warranty Period.

| Sales Code | Description | MSRP |
|------------|---|------------------|
| EC160EL | Volvo EC160EL Crawler Excavator | \$181,284 |
| XC10119 | Boom, 17' 1" (5.2m), GP | \$14,972 |
| XC10239 | Arm, 8' 6" (2.6m), GP | \$6,389 |
| XC10403 | Linkage with lifting eye, GP | \$293 |
| XC20104 | Track Pads, 28" Triple Grouser | \$11,055 |
| XC10503 | Decal Kit NA | \$0 |
| XC20205 | Roller guard STD | \$0 |
| XC20302 | Lower frame - foldable steps | \$0 |
| XC20401 | Belly Cover STD, 4.5mm | \$99 |
| XC30101 | Engine NA | \$0 |
| XC30202 | Cooling System High Capacity | \$0 |
| XC30401 | Air precleaner, Cyclone | \$126 |
| XC40112 | Anti-vandal mounting brackets on cab | \$0 |
| XC40103 | CareCab w/ Opening Hatch | \$513 |
| XC40203 | Seat, Air suspension w/Heater & X-Isolator | \$1,360 |
| XC41204 | Seat Belt, 3 inch Retractable | \$0 |
| XC40405 | Joystick, 4 Switches | \$1,254 |
| XC40502 | Air conditioning, ACC (automatic climate control) | \$2,862 |
| XC40602 | Universal key | \$0 |
| XC40708 | Radio with MP3, USB port & Bluetooth | \$0 |
| XC50000 | Work lights on deck & boom, Halogen | \$0 |
| XC50102 | Travel alarm | \$0 |
| XC50132 | Battery switch protector | \$0 |
| XC50144 | Volvo Smart View on Instrument Cluster only | \$0 |
| XC50402 | CareTrack, GSM/Satellite | \$0 |
| XC50404 | CareTrack Connectivity 4 yr Subscription | \$0 |
| XC50406 | De-activate SAT | \$0 |
| XC60102 | Hydraulic oil ISO VG46 | \$699 |
| XC70302 | Manual, English | \$0 |
| XC80153 | Counterweight, 7060lbs (3200kg), fabrication | \$4,628 |
| XC80202 | Under cover HD, 4.5mm superstructure | \$0 |
| XC70501 | Frame lifetime guarantee | \$0 |
| XC80152 | CWT 2750kg, Fabrication | \$3,978 |
| | MSRP Total | \$229,512 |



Company ID Number: 505216

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION
MEMORANDUM OF UNDERSTANDING

ARTICLE I

PURPOSE AND AUTHORITY

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Department of Homeland Security (DHS) and Cowin Equipment Co Inc (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, the Social Security Administration (SSA), and the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts or to verify the entire workforce if the contractor so chooses.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor with the FAR E-Verify clause") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all employees verified under this MOU and the employment authorization of U.S. citizens.
2. SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.
3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed

E-Verify



Company ID Number: 505216

To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify at 888-464-4218.

| | |
|---|------------|
| Employer Cowin Equipment Co Inc | |
| Tracy Womack | |
| Name (Please Type or Print) | Title |
| <i>Electronically Signed</i> | 02/15/2012 |
| Signature | Date |
| Department of Homeland Security – Verification Division | |
| USCIS Verification Division | |
| Name (Please Type or Print) | Title |
| <i>Electronically Signed</i> | 02/15/2012 |
| Signature | Date |

Information Required for the E-Verify Program

Information relating to your Company:

| | |
|---------------------------------|----------------------------|
| Company Name: | Cowin Equipment Co Inc |
| Company Facility Address: | 2238 Pinson Valley Parkway |
| | Birmingham, AL 35217 |
| Company Alternate Address: | PO Box 10624 |
| | Birmingham, AL 35202 |
| County or Parish: | JEFFERSON |
| Employer Identification Number: | 630141942 |

Company ID Number: 475502

**E-VERIFY
CORPORATE COMPANY**

**If you have any questions, contact E-Verify at
888-464-4218.**

**INFORMATION REQUIRED
FOR E-VERIFY**

Information relating to your Company:

Company Name: Cowin Equipment Company Inc

Company Facility Address: 2238 Pinson Valley Parkway
Birmingham, AL 35217

County or Parish: JEFFERSON

Information relating to the Corporate Administrator(s) for your Company on policy questions or operational problems:

| | | | |
|-------------------|-------------------|-------------|------------------|
| Name: | George Tickle | Fax Number: | (205) 841 - 2639 |
| Telephone Number: | (205) 488 - 3950 | | |
| E-mail Address: | gtickle@cowin.com | | |
| Name: | Tracy Womack | Fax Number: | (205) 488 - 3164 |
| Telephone Number: | (205) 488 - 3959 | | |
| E-mail Address: | twomack@cowin.com | | |

INVITATION TO BID HEAVY EQUIPMENT

NOTICE OF BID OPENING

NOTICE IS HEREBY GIVEN that the Association of County Commissions of Alabama, which administers the Alabama County Joint Bid Program on behalf of Alabama's county governing bodies, shall receive and open bids for the purchase of zero (0) or more items of heavy road equipment at its office located at 2 North Jackson Street, Montgomery, Alabama, at **10:00 a.m. on Friday, November 1, 2024**. Bid specifications are available at <http://www.alabamacounties.org/heavy-equipment/> for each of the following items:

Track Mount Excavators
Compact Track Mount Excavators
Mini Track Excavator
Wheeled Excavator
Highway Speed Truck Excavators
Motor Grader
Wheel Loader
Heavy Duty Dump Chassis
Lowboy Tractor

Lowboy Trailer
Skid Steer and Attachments
Ride-on Industrial Boom Mowers
Rubber Tire Roller
One-man Pothole Patchers
Trailer Mount Mastic Patcher/Crack Sealer
Chip Spreader
Asphalt Distributor

Time is of the essence in submitting bids and only bids received in the Association office by 10:00 a.m. Central Time on Friday, November 1, 2024 will be opened and considered. Bidders and any other interested individuals are invited to attend the bid opening.

NOTICE OF BID OPENING PROCEDURES

All bids for **Heavy Equipment** will be opened and the name(s) of the bidders read aloud on the morning of the bid opening on **Friday, November 1, 2024 at 10:00 a.m.** at 2 North Jackson Street, Montgomery, AL. The specifics of each bid submitted will be compiled by the Association staff thereafter and will be available, **upon written or emailed request**, one week after the bid opening. Requests should be emailed to jointbid@alabamacounties.org.

THE INVITATION PACKAGE

The invitation package for each item to be bid includes: this invitation to bid, the written bid specifications for the particular item of heavy road equipment, and a Bid Submittal Form to be used in submitting a bid for that particular item. Bidders should verify that they have received all pages of the invitation package. If there are any omissions, the bidder should contact **Kenya Howard** in the Association office by mail, fax, or e-mail (jointbid@alabamacounties.org) to request missing pages. It is the responsibility of the bidder to make this request in sufficient time to prepare and submit the bid in time for the bid opening. Bidders should carefully read and comply with all parts of the invitation package, including all attachments and/or any addendum.

PREPARING AND SUBMITTING BIDS

All bids must be typed or hand written in ink on the attached Bid Submittal Form. **The completed Bid Submittal Form shall be placed in front of and separated from all other documents included in the bid packet, such that it will be the first document viewed upon opening the bid packet.**

Bids submitted in pencil and bids not submitted on the Bid Submittal Form **will not** be considered. All bids shall include a current catalog or model specification document for the equipment model number being offered for consideration. Bids submitted without such documentation **will not** be considered. Only information contained on the attached Bid Submittal Form and in the model specification document will be considered in evaluating bids.

Each separate requirement in the bid specification includes a block for indicating whether or not the item bid meets the specification. The bidder shall indicate compliance with each requirement by checking "Yes" or "No" in the block to the right of each bid specification. In addition, the bidder shall indicate the page number in the supplied manufacturer's equipment literature on which compliance with the specification can be verified. Failure to complete this portion of the bid form may result in the subject bid not being considered.

Each bid for one of the heavy equipment items included in the bid package must be submitted on the Bid Submittal Form for that item and forwarded in a separate envelope with the bid item and item number clearly identified on the outside of the envelope. Envelopes containing a "no bid" shall also include the words "NO BID" on the outside of the envelope. Facsimiles and e-mails will not be accepted. Bids submitted by "Express/Overnight" services must be in a separate inner envelope or package sealed and identified as stated above. All bids must be received in the Association office prior to the bid opening. Bids received after the deadline will be returned unopened.

The County Joint Bid Program reserves the right to require a performance bond from successful bidders as permitted under Alabama law. However, **no bid bond is required for this bid offering.**

All bids should be mailed or hand-delivered to:

ATTN: Patrick McDougald
Association of County Commissions of Alabama or ACCA
2 North Jackson Street, FL 7, Montgomery, Alabama 36104 (Physical Address)
P.O. Box 5040, Montgomery, Alabama 36103 (Mailing Address)

BID SPECIFICATIONS

Please note that each piece of heavy equipment available for bid may include several different sizes and categories of machines. You should read each set of specifications very carefully as the differences vary depending upon the piece and size of equipment.

The award will be based on the total cost of the **Standard Machine** bid by the lowest responsible bidder. Each Bid shall include a **Manufacturer's Suggested Retail Price Sheet (MSRP)** for each machine bid. The percent difference between the Manufacturer's Suggested Retail Price (MSRP) for the standard machine as specified by these bid specifications and the actual price bid by the vendor will be calculated and that percentage discount shall be applied to any options an individual county may choose to add to the machine.

Once the bids have been awarded, any county participant purchasing under this program may, at its discretion, add any of the vendor's available options at the same discount off the Manufacturer's Suggested Retail Price Sheet as was applied to the Standard Machine Price Bid.

Any use of specific names and/or model numbers in the attached specifications is not intended to restrict the bidder or any seller or manufacturer, but is included solely for the purpose of indicating the type, size, and quality of materials, product services, or equipment considered best adapted to the use of the counties participating in the joint bid program.

ACQUISITION AND FINANCING OPTIONS

The awarded Vendor will provide the equipment, including any options required by the purchaser, at the awarded price as contracted through the Joint Bid Program. The purchaser may secure its own financing to acquire the equipment or execute any financial options available under Alabama law with the awarded Vendor in order to acquire the equipment.

BIDDER QUALIFICATIONS

All bidders and all program participants must be in compliance with any applicable federal, state, county and municipal laws, regulations, resolutions and ordinances, including but not limited to, licensing, permitting, and taxation requirements. All bidders should be prepared to submit evidence or documentation as proof that they are properly licensed and permitted under any applicable laws upon request. Such evidence or documentation may be submitted with the bid. Additionally, all bidders shall provide proof that they are in compliance with the E-Verify requirements of Alabama's Immigration Law (Ala. Code § 31-13-1 et seq., as amended by Act No. 2012-491).

BID AWARD

The Houston County Commission will serve as the awarding authority for all bids and will award all contracts at a regular meeting of the Houston County Commission. Any and all bids submitted in compliance with this invitation to bid shall be considered, and award will be made to the lowest responsible bidder meeting bid specifications as determined by the awarding authority in compliance with Alabama law. All bids will be reviewed and evaluated by a committee created for that purpose, which committee will make comments and recommendations to the awarding authority regarding the award. All factors contained in each invitation package will be evaluated in determining the successful bidder, and any omissions of the stated requirements may be cause for rejection of the bid submitted. The awarding authority reserves the right to reject any and all bids, to waive any informality in bids, and to accept in whole or in part such bid or bids solely at its discretion.

The contract period will be one year with an option to renew for a second and third year under identical price, terms, and conditions upon the mutual consent of the vendor and the awarding authority. Any renewal contract shall be approved in writing by the vendor and the awarding authority no later than 90 days prior to the expiration of the existing contract.

CONTACT REGARDING BIDS AND INVITATION

Contact initiated by a potential bidder with any county official, county employee, or member of the Association staff shall only be as specifically set out in this Invitation to Bid. Any questions related to the bid or the County Joint Bid Program shall be directed to Association staff in writing under the procedures set out in this Invitation to Bid. Additionally, a bidder may contact the Association in writing to request an appointment to review bid specifications following the bid opening. **However, there shall be no communication with any county official or county employee regarding this bid between the date of this invitation and the date of bid award.** Any contact other than as set out here shall be deemed as an attempt to unduly influence the bid award, and shall be grounds for rejection of the bid submitted by the bidder initiating such other contact.

Any questions or problems related to downloading or obtaining copies of this Invitation to Bid should be directed to **Kenya Howard** at jointbid@alabamacounties.org or **334-263-7594**.

Any other questions or requests for additional information regarding this invitation or the bid specifications shall be submitted in **writing** no later than five (5) days prior to bid opening to:

ATTN: Patrick McDougald
Association of County Commissions of Alabama
P.O. Box 5040
Montgomery, Alabama 36104

OR

Patrick McDougald
Email: pattymackdaddy@gmail.com